

ND65-8

2-1/2" Aluminum Cone Full-Range Driver




Features

- Low distortion Neo-Sym motor structure
- 4-Layer underhung voice coil
- Black anodized aluminum cone
- X_{MAX} 3.5 mm
- Full-range capability
- Great for line arrays


Parameters

Impedance (Ω)	8
Re (Ω)	7.2
Le (mH) @ 1 kHz	0.58
Fs (Hz)	80.8
Qms	5.64
Qes	0.69
Qts	0.62
Mms (g)	2.3
Cms (mm/N)	1.69
Sd (cm ²)	15.6
Vd (cm ³)	5.4
BL (Tm)	3.5
VAS (liters)	0.58
X_{MAX} (mm)	3.5
VC Diameter (mm)	19
SPL (dB@1W/1m)	78.3
RMS Power Handling (w)	15
Usable Frequency Range (Hz)	80 - 20,000

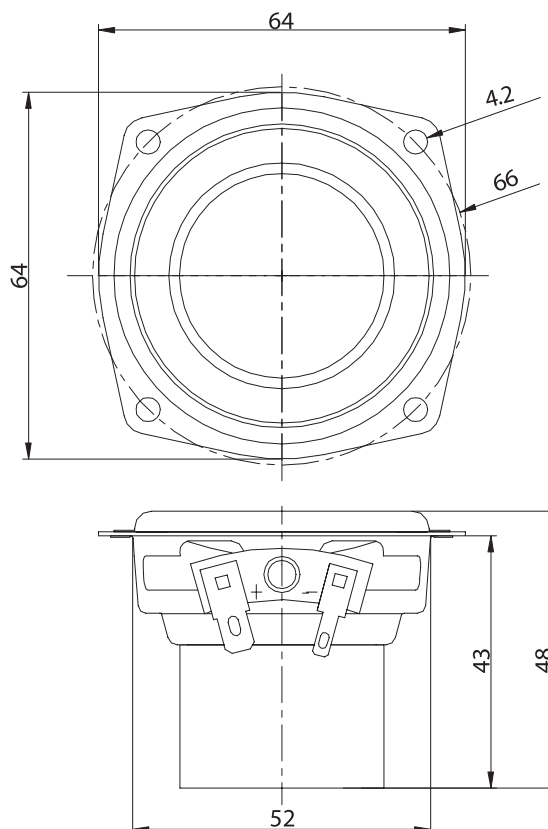

Note: All dimensions in mm.

Frequency Response

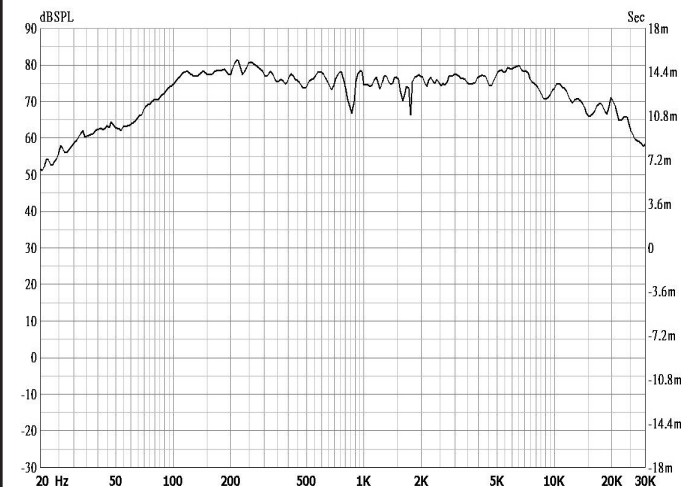

Impedance/Phase

