



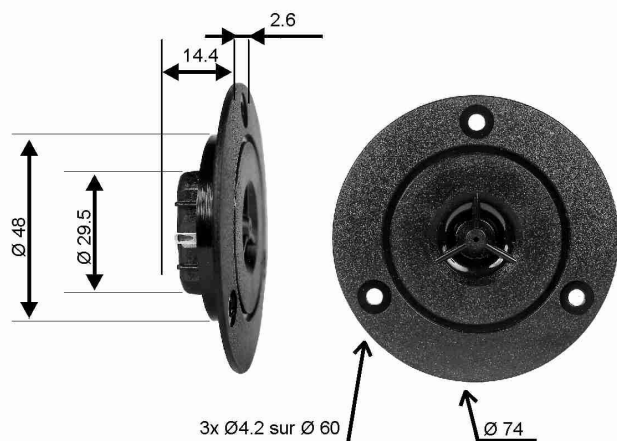

High energy encapsulated magnet
Compact and round light design
Ferrofluid cooled voice coil

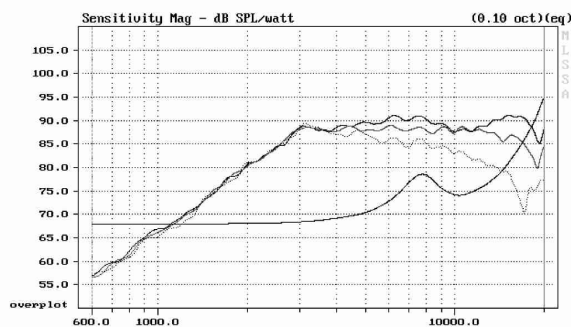

Nominal impedance... 8 ohms
Resonance..... 3000 Hz
Power handling (IEC) 25 W
Sensitivity (2.83V/1m) 90.0 dB

Voice coil diam..... 10 mm
Voice coil length 2 mm
Former
Layer(s) 2

Resistance (DC)..... 5.5 ohms
Inductance 0.032 mH
Xmax..... ± 0.25 mm

Cone material polymer
Chassis polymer
Total mass..... 55 gr

Compact overmoulded magnet system
Ultra-light moving parts

