

HF DRIVER TW350Ti

Professional Super Tweeter



Key Features

- 1" Voice Coil
- 60 Watts Continuous Power Handling
- 105 dB Sensitivity
- 3,000-25,000 Hz
- Titanium Diaphragm

GENERAL SPECIFICATIONS

Nominal Impedance	8	ohms
RMS Power ¹	60	Watts
Musical Program Power ¹	120	Watts
Sensitivity ²	105	dB
Minimum Crossover Point	5,000	Hz
Frequency Response	3,000-25,000	Hz
Diaphragm Material	Titanium	
Voice Coil Material	Copper	
Voice Coil Diameter	1/25	in/mm
Voice Coil Former Material	Kapton	
Inductance	0.085	mH
Flux Density	1.7	T
Magnet Material	Ferrite	

MOUNTING AND WEIGHT INFORMATION



Overall Diameter	3.5/89	in/mm
Overall Depth	2.43/62	in/mm
Mounting Depth	2.08/53	in/mm
Net Weight	1.32/.60	Lbs/Kgs

¹With Crossover at 5kHz, 12db octave


²2.83v@1m

NOTE: Driver must be connected to a crossover that meets recommended specifications.

NOTE: Products are subject to change without notice, please check PRVAudio.com for the latest datasheet.

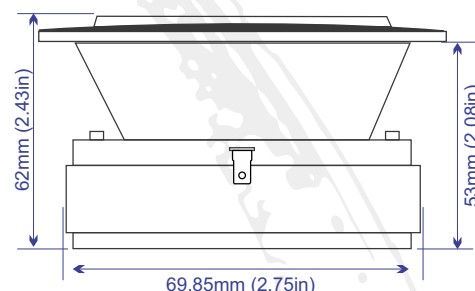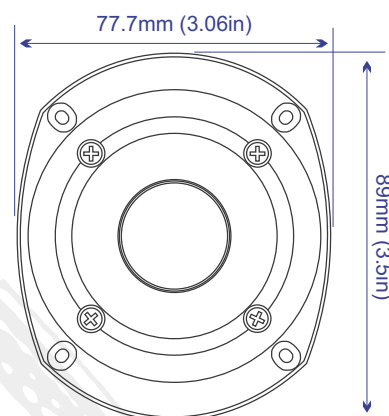

Frequency Response Measured at 2.83v/1m

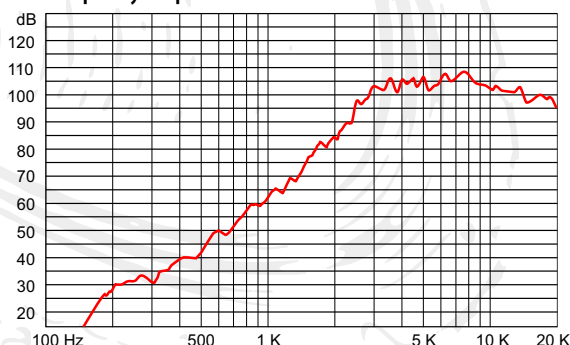

PRV AUDIO USA (USA and Export)
MIAMI, FL
support@prvaudio.com
http://www.prvaudio.com

PRV AUDIO BRAZIL (Brazilian Sales Only)
SAO LEOPOLDO, RS
vendas@prvaudio.com.br
http://prvaudio.com.br