


- UNDERHUNG DESIGN
- HIGH POWER LOADING DESIGN
- FULL RANGE FREQUENCY RESPONSE
- DIE CAST BASKET
- PAPER CONE WITH SANTOPRENE SURROUND
- MAGNETICALLY SHIELDED
- SPECIAL PHASE PLUG DESIGN

3" PAPER CONE/ FULL RANGE



DIAPHRAGM MTL	Paper
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	8 W
DCR IMPEDANCE	6.6 W
SENSITIVITY 1W/1m	87 dB
FREQUENCY RESPONSE	100-19k Hz
FREE AIR RESONANCE	100 Hz
VOICE COIL DIAMETER	20 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	15 W
MAXIMUM POWER INPUT	30 W
FORCE FACTOR, BL	3.38 TM
MAGNET WEIGHT (3.5oz)	103 g
MOVING MASS	1.79 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1368.5280MN ⁻¹
EFFEC.PISTON AREA	0.0032M ²
Levc	0.2779mH
Zo	67.4385ohm
X-max	0.20 mm
Vas	1.99 Liter.
Qts	0.59
Qms	5.76
Qes	0.66

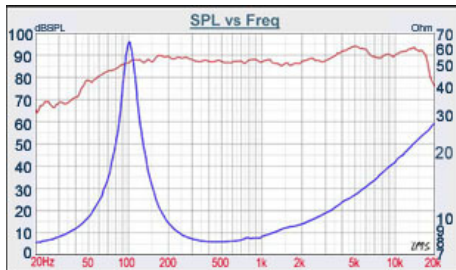

VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com

CLOSE