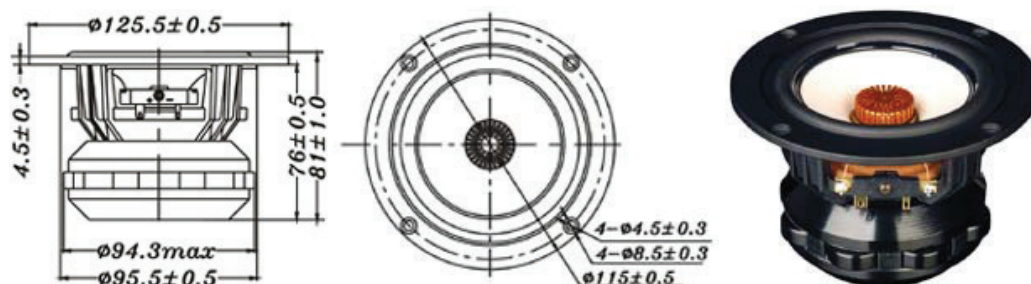


F SERIES**W4-1879**

4" PAPER FULL RANGE


- FULL RANGE DESIGN

- UNDERHUNG MOTOR DESIGN WITH NEO MAGNET, $X_{max}=5mm$

- VERY LOW THD(2nd AND 3rd HARMONIC DISTORTING)

- UNIQUE PHASE PLUG FOR BETTER DISPERSION

- BAMBOO FIBER PAPER CONE WITH DURABLE FOAM RUBBER SURROUND

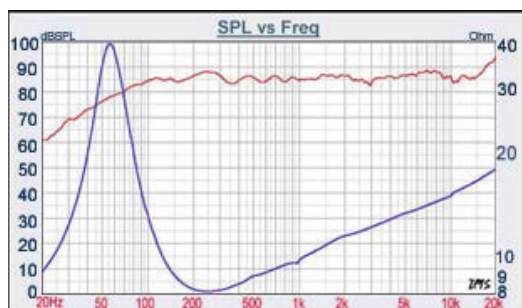

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com

DIAPHRAGM MTL	Paper
SURROUND MTL	Foam Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.3 Ω
SENSITIVITY 1W/1m	87 dB
FREQUENCY RESPONSE	55-20K Hz
FREE AIR RESONANCE	55 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	15 mm
RATED POWER INPUT	25 W
MAXIMUM POWER INPUT	50 W
FORCE FACTOR, BL	4.19 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	4.0 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1977 μMN^{-1}
EFFEC.PISTON AREA	0.0057 M ²
Levc	0.025 mH
Zo	39 ohm
X-max	5.0 mm
Vas	9.12 Liter.
Qts	0.43
Qms	2.68
Qes	0.51

CLOSE