



# F SERIES

# W3-1231SN

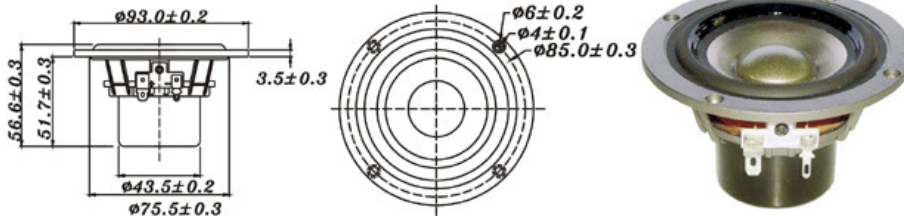

3" TI FULL RANGE

- FULL RANGE FREQUENCY RESPONSE
- HIGH POWER LOADING DESIGN
- DIE CAST BASKET, TITANIUM COLOR PAINTED, VC VENTED DESIGN
- TITANIUM CONE WITH SANTOPRENE SURROUND
- MAGNETICALLY SHIELDED
- UNDERHUNG MOTOR DESIGN

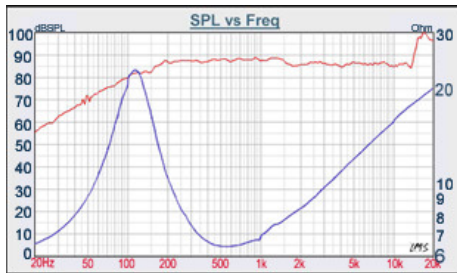

DIAPHRAGM MTL	Titanium
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	6 W
DCR IMPEDANCE	5.6 W
SENSITIVITY 1W/1m	88 dB
FREQUENCY RESPONSE	100-20K Hz
FREE AIR RESONANCE	100 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	8 mm
RATED POWER INPUT	15 W
MAXIMUM POWER INPUT	30 W
FORCE FACTOR, BL	5.18 TM
MAGNET WEIGHT ( oz)	Neodymium
MOVING MASS	2.50 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	845.684 MN <sup>-1</sup>
EFFEC.PISTON AREA	0.0032 M <sup>2</sup>
Levc	0.009mH
Zo	36 ohm
X-max	1.25 mm
Vas	1.23 Litr.
Qts	0.30
Qms	1.94
Qes	0.36

**TB SPEAKERS**  
 VOICE:886.2.26570282 FAX:886.2.26580166  
 E-MAIL :info@tb-speaker.com

**CLOSE**